



输出功率：约2.0~50.0W

直流无刷电机

典型应用：医疗器械  
精密仪器  
家用电器  
商业设备


OUTPUT:APPROX 2.0~50.0W

Brushless DC Motor

Typical Applications: Medical Instruments  
Precision Instrument  
Household Appliances  
Business Equipment

## 1.OUTLINE DRAWING:

UNIT:MM

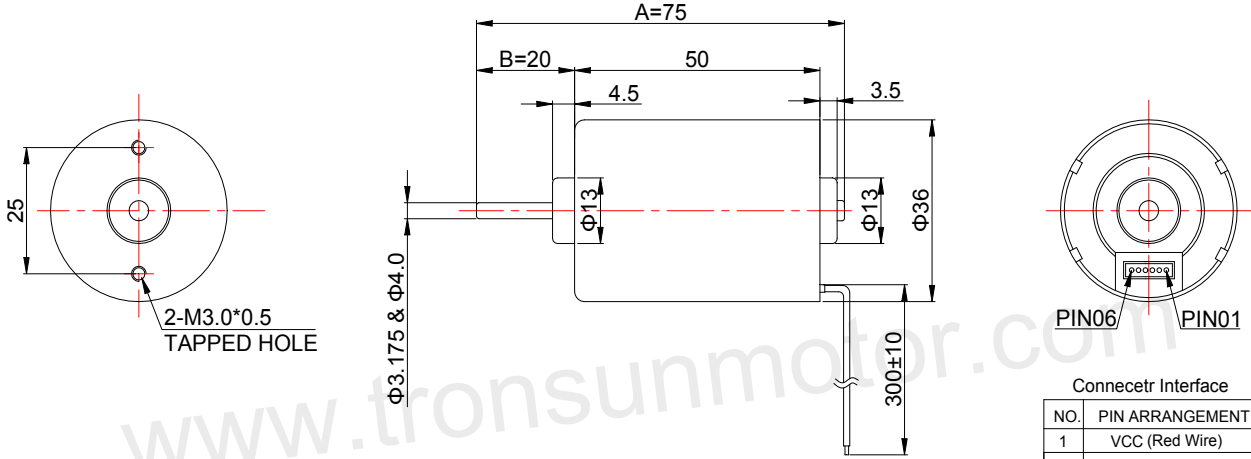

Customizable Parameters:

1. Length A and B
2. Electric Performance

WEIGHT: 180g(Approx)

View:



Connectr Interface

NO.	PIN ARRANGEMENT
1	VCC (Red Wire)
2	FG(Green Wire)
3	CW/CCW(Yellow Wire)
4	GND(Black Wire)
5	PWM(Blue Wire)
6	BRAKE(White Wire)

## 2.MOTOR PERFORMANCE :

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY				STALL			
	OPERATING RANGE	NOMINAL V	SPEED rpm	CURRENT A	SPEED rpm	CURRENT A	TORQUE g.cm	TORQUE mN.m	OUTPUT W	TORQUE g.cm	TORQUE mN.m	CURRENT A
BL3650I-126000	8.0~15.0	12.0	6000	0.59	4750	2.24	358	35.13	17.44	1720	168.79	8.50
BL3650I-248000	8.0~26.0	24.0	8000	0.35	6520	1.54	362	35.53	24.21	1962	192.54	6.80
BL3650I-243100	8.0~26.0	24.0	3100	0.12	2600	0.62	360	35.33	9.60	2210	216.88	3.20

